

Overview:

The PD8 power distribution module converts a single AC or DC input into eight (8) individually fused outputs.

Specifications:

Input:

- Handles up to 28VAC/VDC.

Outputs:

- Eight (8) individually fused outputs (fuses are rated @ 3.5 amp up to 5 amp fuses may be used).
- Surge suppression.

Visual Indicators:

- Power output LED indicator.

Additional Features:

- Power ON / OFF switch.

Board Dimensions (approximate):

5.25"L x 3.25"W x 1"H

Installation Instructions:

1. Mount PD8 in desired location/enclosure.
2. Connect the desired power supply output to terminals marked [INPUT] (*Fig. 1A*).
Note: If using DC voltage, left terminal is NEG. (-) and right terminal is POS. (+) (*Fig. 1A*).
3. Measure output voltage before connecting devices. This helps avoid potential damage.
 All terminals with common suffix P "1P, 2P..." are same polarity.
4. Set power switch [SW1] to the OFF position.
5. Connect each device to terminal pairs 1 to 8, marked [1P-1N thru 8P - 8N].
6. Fuses rated at 3.5A/250V (Replacement fuses can be rated at 5.0 amp).
7. Set power switch [SW1] to the ON position.

Fig. 1


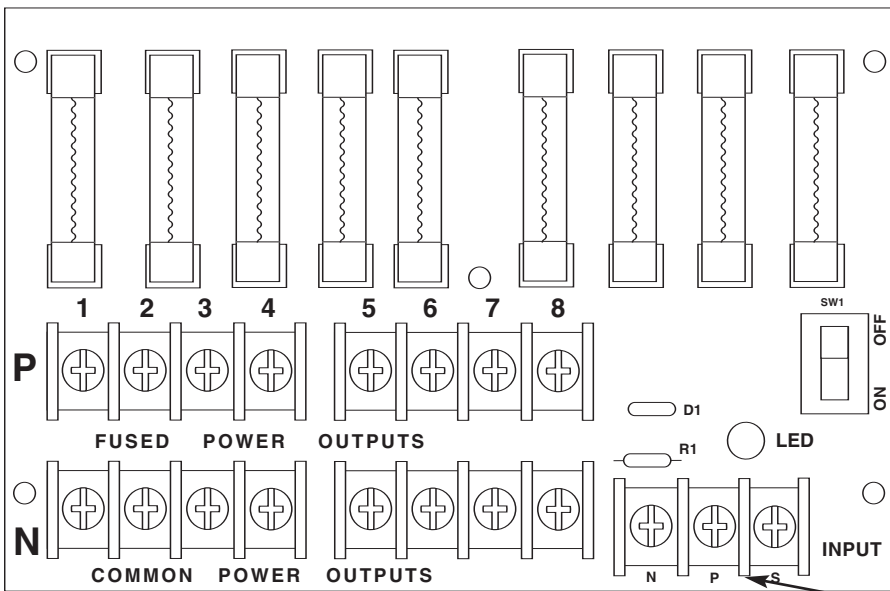


Fig. 1A

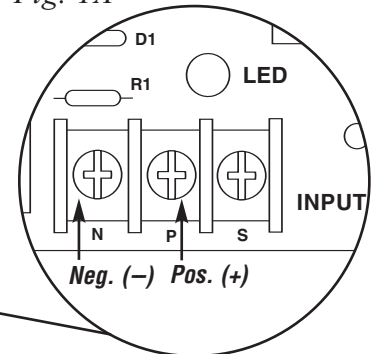

Altronix is not responsible for any typographical errors. Product specifications are subject to change without notice.